



THE UNIVERSITY *of* EDINBURGH

Edinburgh Research Explorer

Environmental sustainability of the solar photo-Fenton process for wastewater treatment and pharmaceuticals mineralization at semi-industrial scale

Citation for published version:

Foteinis, S, Monteagudo, JM, Duran, A & Chatzisyseon, E 2018, 'Environmental sustainability of the solar photo-Fenton process for wastewater treatment and pharmaceuticals mineralization at semi-industrial scale', *Science of the Total Environment*, vol. 612, pp. 605-612.
<https://doi.org/10.1016/j.scitotenv.2017.08.277>

Digital Object Identifier (DOI):

[10.1016/j.scitotenv.2017.08.277](https://doi.org/10.1016/j.scitotenv.2017.08.277)

Link:

[Link to publication record in Edinburgh Research Explorer](#)

Document Version:

Peer reviewed version

Published In:

Science of the Total Environment

General rights

Copyright for the publications made accessible via the Edinburgh Research Explorer is retained by the author(s) and / or other copyright owners and it is a condition of accessing these publications that users recognise and abide by the legal requirements associated with these rights.

Take down policy

The University of Edinburgh has made every reasonable effort to ensure that Edinburgh Research Explorer content complies with UK legislation. If you believe that the public display of this file breaches copyright please contact openaccess@ed.ac.uk providing details, and we will remove access to the work immediately and investigate your claim.



**Environmental sustainability of the solar photo-Fenton process for wastewater
treatment and pharmaceuticals mineralization at semi-industrial scale**

Spyros Foteinis^a, Jose Maria Monteagudo^b, Antonio Durán^b, Efthalia Chatzisyneon^{c*}

^a Senior Engineer, Greek Public Power Corporation (PPC) Renewables S.A., Kapodistriou 3,
Ag. Paraskeui, GR-15343, Attica, Greece

^a Department of Chemical Engineering, Grupo IMAES, Escuela Técnica Superior de
Ingenieros Industriales, Instituto de Investigaciones Energéticas y Aplicaciones Industriales
(INEI) University of Castilla-La Mancha, Avda. Camilo José Cela 3, 13071 Ciudad Real
(Spain).

^c Institute for Infrastructure and Environment, School of Engineering, University of Edinburgh,
Edinburgh EH9 3JL, United Kingdom

* Corresponding author: e.chatzisyneon@ed.ac.uk, tel.: +44(0)1316505711

Abstract

The environmental sustainability of a semi-industrial solar photo-Fenton reactor, treating real effluents emanating from a pharmaceutical laboratory, is assessed herein. The life cycle assessment/analysis (LCA) methodology was employed and real life cycle inventory (LCI) data was collected from a ferrioxalate-assisted homogeneous solar photo-Fenton wastewater treatment plant (WWTP), at Ciudad Real, Spain. Electricity was provided by photovoltaic (PV) panels in tandem with a battery bank, making the plant autonomous from the local grid. The effective treatment of 1 m³ of secondary-treated pharmaceutical wastewater, containing antipyrine, was used as a functional unit. The main environmental hotspot was identified to be the chemical reagents used to enhance treatment efficiency, mainly hydrogen peroxide (H₂O₂) and to a smaller degree oxalic acid. On the other hand, land use, PV panels, battery units, compound parabolic collectors (CPC), tanks, pipes and pumps, as materials, had a low contribution, ranging from as little as 0.06% up to about 2% on the total CO_{2eq} emissions. Overall, the solar photo-Fenton process was found to be a sustainable technology for treating wastewater containing micropollutants at semi-industrial level, since the total environmental footprint was found to be 2.71 kg CO₂ m⁻³ or 272 mPt m⁻³, using IPCC 2013 and ReCiPe impact assessment methods, respectively. A sensitivity analysis revealed that if the excess of solar power is fed back into the grid then the total environmental footprint is reduced. Depending on the amount of solar power fed back into the grid the process could have a near zero total environmental footprint.


Keywords: solar photocatalysis, solar energy, sustainability, renewable energy, LCA, endocrine disruptors

1. Introduction

Nowadays, the presence of persistent contaminants of the order of the $\mu\text{g/L}$ or ng/L , i.e. micropollutants, in natural water bodies constitutes a grave environmental problem of emerging concern (Grandclément et al., 2017). Micropollutants are non-regulated contaminants with unique characteristics and behaviour in the wastewater, which even at miniscule concentrations of ng/L can cause detrimental effects to the environment and human health (Virkutyte et al., 2010). Diseases, such as endocrine-related cancers, reproductive disorders, behavioural and learning problems, asthma, and even obesity and diabetes, are linked to exposure to EDCs (WHO, 2013; Rochester, 2013). Adverse effects are also observed in natural ecosystems, with the most common of all being the feminization of male and altered oogenesis in female fish populations, which is already observed in natural water bodies downstream from WWTPs (WHO, 2013; Kidd et al., 2007). They derive from a vast and expanding array of sources, including pharmaceuticals, surfactants, personal care products, hormones, industrial chemicals, pesticides and many other emerging compounds (Luo et al., 2014; Virkutyte et al., 2010). Micropollutants usually end up to the sewer system and are transporting along with the sewage to wastewater treatment plants (WWTPs). The main problem lies to the fact that conventional physicochemical and biological WWTPs have not been designed to cope with micropollutants (Luo et al., 2014), since their main function is to deal with bulk substances that arrive regularly and in large quantities, primarily organic matter and nutrients such as nitrogen and phosphorus (Virkutyte et al., 2010). As a result, WWTPs constitute a major pathway for micropollutants introduction and diffusion to surface water.

Hence, the introduction of advanced treatment technologies, such as advanced oxidation processes (AOPs), able to cope with micropollutants is essential to safeguard human health and the environment. Light-driven AOPs are promising for removing both organic compounds and micropollutants from wastewater matrices (Davididou et al., 2017; Prieto-Rodríguez et al.,

2013). Among the different light-driven AOPs, solar-powered processes, such as the solar photo-Fenton, is believed to be one of the most environmentally friendly and cost-effective process. This is attributed to the fact that natural solar light is used, instead of artificial irradiation, to generate hydroxyl radicals, which drive the treatment process (Expósito et al., 2016). Homogeneous photo-Fenton process (system Fe(II)/H₂O₂) photogenerates hydroxyl radicals through the following reaction (1) (Monteagudo et al., 2009):



However, light-driven AOPs are energy intensive and require chemical inputs, which strongly affects their environmental sustainability (Chatzisyneon et al., 2013; Giménez et al., 2015). Since, solar driven AOPs perform best at areas with abundant sunlight, solar energy harvesting to produce electricity could provide a clean energy source for AOPs operation. Therefore, in areas with high solar irradiance photovoltaic (PV) panels could provide the electricity required for the process, while with battery storage solutions autonomous AOPs treatment plants could be established. Such autonomous pilot-scale solar photocatalytic reactors have been previously used for the treatment of various azo dyes (Garcia-Segura and Brillas, 2016; Garcia-Segura and Brillas, 2014). This choice is very important for remote areas with no grid access, especially for developing countries, where abundant sunlight is available. Moreover, using solely renewable energy sources (RES), such as solar energy, can help moving towards zero or even negative total environmental footprint WWTPs.

Till now, the degradation efficiency of pharmaceuticals in wastewater using the photo-Fenton process is well established at laboratory and pilot scale and to a smaller degree at industrial scale (Expósito et al., 2016). Moreover, research has been mainly focused on the techno-economical feasibility of the solar photo-Fenton process, while only a few works have focused on its environmental performance, but mainly at laboratory (Giménez et al., 2015) or

pilot scale (Ioannou-Ttofa et al., 2017). Nonetheless, solar photo-Fenton's environmental sustainability at industrial level, where economies of scales exist, remains largely unknown. Moreover, to the best of our knowledge there is no work dealing with the environmental sustainability of an autonomous solar photo-Fenton plant, at semi-industrial scale, treating real pharmaceutical effluent that contains micropollutants.

To this end, this work examines the environmental sustainability of a semi-industrial autonomous solar compound parabolic collector (CPC) plant, based on solar photo-Fenton process assisted with ferrioxalate. The CPC plant operates under Mediterranean climatic conditions, in Ciudad Real, Spain. Real life cycle inventory (LCI) data was collected for the construction, operation and end-of-life of the CPC plant and the life cycle assessment (LCA) methodology was employed.

Results were analysed using both IPCC 2013 and ReCiPe life cycle impact assessment (LCIA) methods. The first is a single issue environmental impact assessment method based on CO₂ equivalent (CO_{2eq}) emissions and thus it is easier understood by decision and policy makers and the general public (Ioannou-Ttofa et al., 2016; Chatzisyneon et al., 2016). The latter is a state of the art method that is harmonised in terms of modelling principles and choices and offers results at both the midpoint and endpoint level (Goedkoop et al., 2009). It is the most recent and harmonized indicator approach in LCIA, which transforms the long list of LCI results into eighteen midpoint and three endpoint indicators, to express the relative severity on an environmental impact category (PRé Consultants 2017).

2. Material and methods

2.1 Description of the solar CPC autonomous unit

A semi-industrial solar compound parabolic collector (CPC reactor) treatment unit is examined herein. It is installed on the premises of the University Castilla-La Mancha in Ciudad Real, Spain. The CPC plant operates under the Mediterranean climatic conditions, where abundant sunlight is available (mean solar intensity 30 W/m^2) and is able to treat $0.7 \text{ m}^3/\text{h}$ of aqueous effluent, operating under a continuous mode. It consists of borosilicate glass tubes (total volume 350 L), a continuously stirred reservoir tank (1500 L), a centrifugal pump and connecting tubes and valves. The CPC unit is equipped with 277 W mono-crystalline PV panels, mounted on a fixed south-facing (tilted to 39°) platform, while solar power storage is accomplished by means of a battery bank, as to provide a constant stream of electricity. Among others, the CPC plant can efficiently treat pharmaceutical wastewater at semi-industrial level, by means of the ferrioxalate-assisted solar photo-Fenton process. A description of the semi-industrial autonomous CPC plant can be found in (Expósito et al., 2016). It has to be noted that the CPC plant comprise part of a larger system that includes a 132 litre artificial ultraviolet (UV-C and UV-A) reactor, which can be used in tandem with the CPC or independently. The above system has been design to operate at standalone mode, i.e. without the need of electricity inputs from the local electrical grid, using ten 277 W PV panels and twelve 1.92 kWh battery units.

2.2 Materials

Industrial wastewater, which originated from a nearby pharmaceutical laboratory, was treated in the CPC reactor. The effluent's initial conditions were $\text{COD} = 3,875 \text{ mg/L}$, $\text{TOC} = 1,914 \text{ mg/L}$, $\text{pH} = 6.57$, and $\text{turbidity} = 26.3 \text{ NTU}$. The wastewater also contained micropollutants, i.e. antipyrine= 389 mg/L . The detailed physicochemical characteristics can be found in Expósito et al. (2016). It is generally accepted that a process train comprising

aerobic/anaerobic biological secondary treatment and AOPs for tertiary treatment is a viable option to effectively treat industrial wastewaters (Chatzisyneon et al., 2013; Ioannou-Ttofa et al., 2017). As such, light-driven AOPs perform better for tertiary treatment applications and therefore should be used after the secondary treatment is achieved. Hence, the pharmaceutical wastewater that was examined in this work was first diluted with tap water to reduce its initial TOC content to 400 mg/L, in order to simulate a secondary-treated effluent. The chemical reagents required for the treatment process were Merck's analytical grade ferrous sulfate ($\text{FeSO}_4 \cdot 7\text{H}_2\text{O}$), oxalic acid $(\text{COOH})_2 \cdot 2\text{H}_2\text{O}$ and 30% w/v hydrogen peroxide (H_2O_2). Also, sulfuric acid (H_2SO_4) and sodium hydroxide (NaOH) were used to adjust the pH to desirable levels, i.e. keep it constant at 2.7, as required.

3. Environmental sustainability analysis

In order to assess the environmental performance of the semi-industrial autonomous CPC plant, the life cycle assessment (LCA) methodology, as set in ISO 14040 (ISO, 2006a) and 14044 (ISO, 2006b) was employed. The LCA's geographical coverage refer Spain, the Mediterranean basin and areas with similar climate conditions (in all experiments the mean solar intensity was $\sim 30 \text{ W/m}^2$). Where required background data (e.g. raw materials, fuel, electricity etc.) for Spain were used, while if they were not available European or, in their absence, global data were used as proxies. Finally, average technology was assumed.

3.2 Functional unit

The environmental performance of the ferrioxalate assisted homogeneous solar photo-Fenton process, to treat both the organic content and target pharmaceuticals, was examined. For this reason, the removal of the total organic carbon (TOC) as well as antipyrine, a typical pharmaceutical that acts as a micropollutant in wastewater matrices, was monitored. Therefore,

the functional unit that better corresponds to the goal and scope of this work is the effective treatment of 1 m³ of secondary-treated, in this case diluted, real industrial wastewater, containing pharmaceuticals. Effective treatment corresponds to CPC plant optimal operation conditions, i.e. total removal of antipyrine and at least 79% of effluent TOC or mineralization of 81.3 mg/L of antipyrine and removal of 316 mg/L of TOC. This can be achieved after 120 min of treatment in the presence of 2,500 mg/L H₂O₂ and 20 mg/L Fe.

3.3 System boundaries

Figure 1 shows the LCA system boundaries, i.e. the smallest elements (unit processes) considered in LCI analysis for which input and output data were quantified (ISO, 2006b). As shown in Figure 1, all main materials for CPC plant construction, land use, energy usage and other important inputs (e.g. chemical reagents) and outputs (e.g. waterborne emissions), as well as the disposal/recycling after the end of the plant's life cycle, are included in this work. Disposal/recycling was taken into account by assuming the recycling of plant's main parts/materials (e.g. glass, aluminium, plastics etc.) and the disposal of the non-recycled parts (e.g. pH meter, flowmeter etc.), as inert waste, at a sanitary landfill. Moreover, the transportation of the main construction materials and of the chemical reagents was taken into account, while the transport and the pre-treatment (i.e. dilution) of the real industrial wastewater is beyond of the scope of this work and therefore is external to system boundaries. Finally, since various routes for the final disposal/reuse of the treated effluent exist, e.g. disposal at natural waterbodies, reuse for irrigation purposes, etc., each with its own environmental impact/benefit, the discharge route of the treated effluent is beyond the scope of this work and therefore is not included in the system boundaries, i.e. a cradle-to-gate (treatment) approach is used.

Figure 1

3.4 Assumptions and limitations

The following assumptions and limitations were taken into account. It is assumed that the life span of the pilot plant is 20 years, with a 10 h daily operation all year round. The useful operating life of the solar PV units is estimated at 20-25 years, while the lifespan of the battery bank is assumed to be 15 years (i.e. it will be replaced once during the pilot plant's life span). Since, pumps were not identified in proprietary LCI databases or in the literature its main material, i.e. its motor, was taken into account, having a useful operating life of 15 years, when operating 5,000 hours annually (AAB, 2002); hence the pump will be replaced once during the CPC plant's life span. Replacement of the piping was not considered, since according to (Ioannou-Ttofa et al., 2017) they exhibit a very high lifespan, i.e. 50 years. Moreover, it was assumed that the useful life span of the CPC photoreactors is 10 years and therefore they will be replaced once. Moreover, a mean transportation distance of 200 km, i.e. from Spain's capital Madrid to Ciudad Real, was ascribed to all materials/equipment/chemical reagents, by means of a lorry truck. Recycling was taken into account by assuming a 70% of the recyclable materials to be recycled (e.g. metals, glass etc.) and the remaining content to end up in a sanitary landfill. As mentioned above the CPC plant comprises part of a larger system and as such the solar PVs and battery bank have been design to meet the needs of the whole system. Since, the CPC plant requires only a fraction of the installed solar power and battery bank capacity, it was assumed that two 277 W PV panels and two 1.92 kWh battery units can meet the CPC plant electricity needs (Table 1). Finally, extraordinary conditions, such as natural disasters and weather extremes, are external to system boundaries.

3.5 Life cycle inventory of CPC plant

As mentioned above, the cradle-to-gate (effluent treatment) life cycle inventory (LCI) of the CPC pilot plant was built using real data from its construction, operation and end of life phase. The LCI was then simulated using the software program SimaPro to estimate the environmental sustainability of the CPC plant. Most unit processes were taken directly from SimaPro's proprietary LCI database (e.g. ecoinvent), while in cases where unit processes were not identified in proprietary databases their LCI was taken from the literature. Specifically, since LCI data for the lead-acid rechargeable battery (Sonnenschein A600 Solar Battery, A602-960S (8 OPzV 960)) was not identified in SimaPro's LCI databases, its LCI was built following (Jülch et al., 2015). For PV panels (Atersa A-277P) data from SimaPro LCI databases was used, assuming that single-Si panels were installed. The LCIs of flowmeter and pH meter were built using data for their main materials, according to our previous publication (Ioannou-Ttofa et al., 2017). The LCI of the CPC photoreactors was created using ecoinvent's LCI data for borosilicate glass tubes. The LCI of polypropylene (PP) pipping system was built following the methodology described in Ono et al. (2015) (Ono et al., 2015), while for the case of PP tank LCI data from SimaPro databases referring to its main material, i.e. PP, was used. LCI data for the pump under study was not identified. Therefore, LCI data for its main part, i.e. motor, was taken from the literature (AAB, 2002) and re-scaled to fit the rated output of the pump under study. The LCI of the chemical reagents was either taken from proprietary databases or from the literature. Specifically, ferrous sulfate was taken from SimaPro's proprietary LCI databases, in the form of iron sulphate (FeSO_4). After treatment the ferrous and ferric ion waterborne emissions were taken from SimaPro's proprietary LCI databases, in the form of iron. Hydrogen peroxide, sulfuric acid and sodium hydroxide were also taken by proprietary LCI databases, but no waterborne emissions were taken into account, since H_2O_2 is fully consumed during the photo-Fenton reaction. Oxalic acid was not identified in existing LCI

databases and therefore it was built using LCI data from the literature (Raibeck, 2008). Similarly, waterborne emissions were not taken into account, since oxalic acid is also fully consumed during the photo-Fenton reaction. Table 1 summarizes the LCI of the solar driven autonomous CPC plant, including its waterborne emissions.

Table 1

3.6 Life cycle impact assessment

The life cycle impact assessment (LCIA) is one of the most important stages in the LCA, since in this stage the collected inventory data are associated with specific environmental impacts/damages and also these impacts/damages are analysed and assessed. According to ISO 14040:2006 and ISO 14044:2006, LCIA consists of the following (a) mandatory elements: (i) selection of impact categories, category indicators and characterization models; (ii) classification, i.e. assigning inventory data to selected impact categories; and (iii) characterization, i.e. modelling the inventory data within impact categories; and (b) optional elements: (iv) normalisation, i.e. calculate the magnitude of category indicator results relatively to reference information; (v) grouping, i.e. impact categories sorting/ranking; (vi) weighting, i.e. converting/aggregating indicator results across impact categories; and (vii) data quality analysis, i.e. better understanding the reliability of the collection of indicator results (e.g. sensitivity analysis) (ISO, 2006a; ISO, 2006b). Here, both mandatory and optional LCIA elements were considered.

Moreover, results can be expressed at: (a) midpoint level (problem-oriented approach), where environmental impacts are examined earlier in the cause-effect chain and are translated into environmental themes, such as climate change and human toxicity and (b) endpoint level (damage-oriented approach), where impacts are examined at the end of the cause-effect chain,

after midpoint is reached, thus translating environmental impacts into issues of concern, such as damage to human health and to ecosystem quality (Goedkoop et al., 2009). Due to data gaps and assumptions stacking up along the cause-effect chain, the endpoint approach is associated with higher levels of statistical uncertainty, but is easier to comprehend by policy- and decision-makers (Chatzisyneon et al., 2016). Therefore, in order to obtain a comprehensive overview and in-depth understanding results were analysed both at mid- and end-point level using ReCiPe impact assessment method, the successor of Eco-indicator 99 and CML-IA method (PRé Consultants 2017). ReCiPe comprises 18 midpoint impact categories, i.e. climate change (CC), ozone depletion (OD), terrestrial acidification (TA), freshwater eutrophication (FE), marine eutrophication (ME), human toxicity (HT), photochemical oxidant formation (POF), particulate matter formation (PMF), terrestrial ecotoxicity (TET), freshwater ecotoxicity (FET), marine ecotoxicity (MET), ionising radiation (IR), agricultural land occupation (ALO), urban land occupation (ULO), natural land transformation (NLT), water depletion (WD), mineral resource depletion (MRD), fossil fuel depletion (FD). At the endpoint level, most of these midpoint impact categories are further converted and aggregated into three endpoint categories, i.e. damage to human health (HH), damage to ecosystem diversity (ED) and damage to resource availability (RA) (Goedkoop et al., 2009).

The Hierarchist (H) perspective, which is a consensus model based on the most common policy principles, with regard to time frame and other issues, was used (Foteinis & Chatzisyneon, 2016; Goedkoop et al., 2009). Moreover, the attributional LCA (ALCA) approach was selected over the consequential LCA (CLCA), since it provides a description of resource flows and emissions attributed to the functional unit (Foteinis & Chatzisyneon, 2016), which corresponds to the goal and scope of this work. Finally, a single issue impact assessment method, namely IPCC 2013 for a timeframe of 100 years, was used. It compares processes based on CO₂ equivalent (CO_{2eq}) emissions, i.e. greenhouse gas (GHG) emission, used to

measure Global Warming Potential (GWP), which is a standard indicator of environmental relevance (Chatzisyneon et al., 2013). This is also included in ReCiPe's midpoint impact category "Climate Change", but using a single issue method allows a more simple and direct results dissemination to the general public.

4. Results and discussion

4.1 Carbon footprint using IPCC 2013 impact assessment method

The carbon footprint of the ferrioxalate assisted homogeneous solar photo-Fenton process, carried out in the CPC plant, was first estimated using the IPCC 2013 impact assessment method, with a 100 years timeframe. Figure 2 shows IPCC 2013 results and the contribution of each process (e.g. battery bank, PV panel, CPCs, chemical reagents etc.) to the total GHG emissions. Specifically, it was found that the total GHG emissions per functional unit, i.e. for treating 1 m³ of industrial wastewater containing pharmaceuticals, was 2.71 kg CO_{2eq} m⁻³.

Figure 2

As shown in Figure 2, the main contributor to the total CO_{2eq} emissions per functional unit, i.e. the treatment of 1m³ of pharmaceutical industry wastewater, is the use of chemical reagents (92.4% or 2.5 kg CO_{2eq} m⁻³). This large contribution is mainly attributed to H₂O₂ (62.3% or 2.5 kg CO_{2eq} m⁻³) consumption, followed by oxalic acid (14.6% or 0.395 kg CO_{2eq} m⁻³) use. Sulfuric acid (H₂SO₄) has a much smaller contribution on the total GHG emissions (2.25 %), whilst sodium hydroxide (NaOH) contribution is negligible. It should be noted that the H₂O₂ and the oxalic acid are assumed to be totally consumed in the solar Fenton reaction, thus no

waterborne emissions are produced. Moreover H_2SO_4 and NaOH are used for pH adjustment during the solar Fenton process, with the latter being used only at miniscule quantities and only when the pH drops below 3, thus having negligible $\text{CO}_{2\text{eq}}$ emissions. Moreover, small quantities of $\text{FeSO}_4 \cdot 7\text{H}_2\text{O}$ are used, which is a non-toxic or mutagenic metal, and therefore its contribution to the total $\text{CO}_{2\text{eq}}$ emissions is miniscule. Finally, the chemical reagents transportation has an overall high contribution, about 13.15%, to the total carbon footprint. This is mainly attributed to the overall high quantities of H_2O_2 and oxalic acid per functional unit and that their transportation distance was assumed to be 200 km.

The PV panels and battery bank, which provide a constant stream of electricity, contributes 1.03% and 1.07 % on the total carbon footprint, respectively. This small contribution is mainly attributed to the low energy inputs per functional unit, compared to the large quantities of chemicals used. As far as the remaining processes are concerned the foundation, the frame and the CPC unit contribute, as materials, by 1.55 %, 0.988% and 2.05 % to the total $\text{CO}_{2\text{eq}}$ emissions, respectively. Moreover, the storage tank (0.29%), the pipping (0.41%), the sensors (<0.06%) and the pump (0.09%) exhibit very low scores, as materials. The low contribution of the above is attributed to (i) their long life span, i.e. no need or limited replacement during the treatment plant's life cycle, (ii) their overall low quantity per functional unit, (iii) the fact that their main materials are not associated with detrimental effects to the environment and human health and (iv) that recycling was taken into account. Therefore, the main environmental hotspot of the CPC plant, operating at semi-industrial level and using real pharmaceutical effluent, is grossly traced back to the chemical reagents required to enhance the treatment efficiency and specifically to H_2O_2 and to a smaller degree to oxalic acid.

4.2 ReCiPe impact assessment method

ReCiPe is a robust multi-issue impact assessment method and therefore it can provide a more holistic overview of the environmental sustainability of the solar photo-Fenton process. First, ReCiPe characterisation model (midpoint-oriented indicators) is used to calculate the contribution of each parameter to each of the 18 midpoint impact categories. As shown in Figure 3, the main contributor to most impact categories is, by far, the chemical reagents used, which is consistent with the IPCC 2013 LCIA method. The PV modules have a generally low contribution to most impact categories, apart from the ecotoxicity related impact categories, i.e. TET, FET and MET, where it yields a high score. The battery bank has a similar contribution to the PV modules in most impact categories, but it does not yield a very high score on the ecotoxicity related impact categories. The CPC units contribute to all impact categories, but with a small score in all of them. This is also the case for the foundations, the frame and the pump, which exhibit an overall low contribution to most impact categories. Land use is the major contributor to the impact category Urban Land Occupation (ULO), which is the only impact category affected by land use. This is attributed to the fact that CPC plant occupies urban area for at least 20 years according to its life span (Figure 3).

Figure 3

After characterization, midpoint results were normalized, using Europe's reference inventories, and results are shown in Figure 4. The normalized midpoint impact categories that yielded, by far, the highest scores are marine ecotoxicity (MET) closely followed by freshwater ecotoxicity (FET). The main contributor to these categories is the chemical reagents used (mainly H_2O_2), followed by the PV panels and to a smaller degree the battery bank. The reagents are also mainly responsible for the large normalized scores in the impact categories,

354 from higher to lower score, natural land transformation (NLT), freshwater eutrophication (FE),
355 human toxicity (HT), fossil fuel depletion (FD), terrestrial acidification (TA), mineral resource
356 depletion (MRD), particulate matter formation (PMF), climate change (CC) and photochemical
357 oxidant formation (POF). The remaining impact categories exhibit a low to negligible
358 normalized score (Figure 4). The high normalized scores that derive from the use of chemicals
359 can be mainly attributed to the large quantities of H_2O_2 and to a smaller degree to oxalic acid.
360 H_2O_2 is a strong oxidising agent that is widely used as a bleaching agent. At industrial level it
361 is produced by reducing alkyl anthraquinones with hydrogen, in the presence of a catalyst to
362 the hydroquinone, while crude H_2O_2 is extracted from the oxidised working solution by treating
363 with water. Large quantities of energy (mainly fossil fuels) and resources (e.g. water, bauxite,
364 sulphur, etc) are consumed for the production of pure H_2O_2 , while also airborne (e.g. dust, CO_2 ,
365 SO_x , etc), waterborne (e.g. COD, suspended solids, Cl^- , etc) emissions and solid waste (e.g.
366 mineral, slags/ash, inert chemical, etc) are produced (Boustead & Fawer, 1996). This is also
367 the case for oxalic acid production, where large quantities of energy (mainly fossil fuels) and
368 resources (mainly water) are required and also air, water and soil emissions (mainly airborne)
369 are generated. Apart from the direct pressure from raw material consumption and air, water
370 and soil emissions from their production process, a large part of their environmental impact is
371 traced back to energy use, i.e. fossil fuel. For example, airborne emissions (e.g. nitrogen oxides)
372 attributed to power generation from fossil fuel combustion have a negative impact on human
373 health, while phosphate waterborne emissions from fossil fuel extraction negatively affect
374 freshwater ecosystems (Ioannou-Ttofa et al., 2017). Moreover, large areas of natural land are
375 transformed for the extraction, transportation, storage and burning of fossil fuels to produce
376 electricity, thus affecting the impact category NLT, while the fossil fuel burning contribute to
377 their depletion (impact category FD). Also, fossil fuels are consumed for the transportation of
378 the chemical reagents from the place of production to the CPC plant. Therefore, the large

quantities of H₂O₂ and to a smaller extent oxalic acid that are consumed during the solar photo-Fenton process yield the high normalized scores on the aforementioned impact categories.

Moreover, the high normalized scores of the PV modules and to a smaller degree of the battery bank on MET and FET (Figure 4) are attributed to their manufacturing processes, which are responsible for metal emissions (e.g. copper) to the environment. Freshwater and marine ecosystems are very sensitive to metal waterborne emissions, since metals can cause major changes on these ecosystems (Ioannou-Ttofa et al., 2017).

Figure 4

Figure 5 shows the ReCiPe weighted results at endpoint level, using the damage categories human health (HH), ecosystem diversity (ED) and resource availability (RA). Results were expressed using the Hierarchist version, with European normalization and average weighting, which is ReCiPe's default endpoint method. Weighting is an optional step in the LCIA, after normalisation, where the normalised results are multiplied by weighting factors corresponding to each impact category. Weighted results are expressed in Eco-Indicator points (Pt), where 1000 Pt is the yearly environmental load of an average European citizen. As shown in Figure 5 the total environmental footprint of the ferrioxalate assisted homogeneous solar photo-Fenton process is 286.55 mPt per treatment of 1 m³ of pharmaceutical industry wastewater. Specifically, the damage category HH exhibits the highest score (122.36 mPt), followed by RA (110.09 mPt), while ED has the lowest score (54.10 mPt). Similarly to midpoint level, the main contributor to all damage categories is traced to the reagents (91.66%) required to enhance treatment efficiency, with H₂O₂ being the main contributor (59.2%), owing to the high quantities required per functional unit, followed by oxalic acid (14.1%). As mentioned above

the resources and energy required for reagents manufacturing, as well as direct emissions from their manufacturing process strongly affect the environmental sustainability of the CPC plant, since large quantities of H_2O_2 and oxalic acid are required per functional unit. H_2SO_4 contributed 6.05% on the total environmental footprint, while $\text{FeSO}_4 \cdot 7\text{H}_2\text{O}$ and NaOH had a very low and a miniscule contribution, respectively. Chemical reagents transportation contributed about 12% on the total environmental footprint. Moreover, in all damage categories the CPCs, as materials, exhibited a small contribution (1.99%), followed by the foundations (1.24%) and the frame (1%). The land use (0.5%) contributes to the damage category ED, due to the industrial land occupied by the plant during its life span. The score of the foundations and frame to all damage categories is associated with emissions from the extraction and processing, as well as the energy required for the production of cement, steel and aluminium. The pump, tank, sensors and piping have an overall low contribution to all damage categories, due to their high life span, non toxic, non mutagenic and non carcinogenic nature of their main materials, and the small input per functional unit.

Figure 5

The results of this work are in agreement with the study of Rodríguez et al. (2016) where the environmental sustainability of the homogenous Fenton processes for the treatment of pharmaceutical wastewater was examined. It was observed that apart from the metal ion-containing sludge generated during the treatment, which is not generated here, the next environmental hotspot was the use of chemicals, with the contribution of the H_2O_2 being clearly higher than the other chemicals (Rodríguez et al., 2016). Nonetheless, at bench and pilot scale results vary. Giménez et al. (2015) studied, among others, the environmental sustainability of

the photo-Fenton process at laboratory scale, using as a functional unit the removal of 30–50% TOC from 1 L of 50 mg·L⁻¹ metropolol aqueous solution. Since, this study was based on laboratory scale results an average value of 6 g/L Fe²⁺ and an average value of 90 g/L of H₂O₂ was taken into account. It was found that the strongest environmental impacts were always associated with energy consumption, while the impact of producing and delivering the chemicals was more than 2 orders of magnitude lower than that of energy consumption (Giménez et al., 2015).

Moreover, Ttofa et al. (2017) examined the environmental sustainability of solar photo-Fenton oxidation at pilot scale, using as functional unit the treatment of 1m³ of secondary-treated urban wastewater (initial concentrations: COD 25-27 mg L⁻¹, trimethoprim (TMP) 100 µg L⁻¹ and ofloxacin (OFX) 100 µg L⁻¹), and the complete removal of OFX and TMP and 50 % of the COD. In this work also the main environmental hotspot was found to be electricity consumption, while chemical use had an overall low contribution on the total environmental footprint (Ioannou-Ttofa et al., 2017).

The underlying reason for electricity usage being the main hotspot in the lab or pilot scale is mainly attributed to the fact that in these experimental set-ups the effluent that is treated is usually clean water spiked with targeted pharmaceuticals or high quality treated effluent, containing very low concentration of organics. Hence, in these cases very low reagent amounts are required, compared to real effluent which are rich in organic matter.

The large contributions of the reagents, i.e. H₂O₂ and oxalic acid, to the total environmental footprint observed herein is twofold. First, and more importantly, the treatment of real effluent was examined here and therefore its initial organic and micropollutant load was high, thus requiring high amounts of chemical reagents for its effective treatment. In general, the higher the initial organic load the higher the amounts of oxidation reagents, i.e. H₂O₂ and oxalic acid,

are required. Therefore, when a secondary treated effluent with low organic load, such in the case of existing work at bench and pilot scale, is assessed, then only a fraction of chemicals is required. Moreover, in this work electricity was provided directly by a renewable energy source, i.e. solar energy, which is more environmentally friendly from energy mixes based on fossil fuels, such as in the case of Ioannou-Ttofa et al. (2017), which minimized electricity contribution to the total environmental footprint.

4.3 Sensitivity analyses

A sensitivity analysis was carried out to examine the effect of the chemical reagents concentration on the total environmental footprint and how results will be affected if the excess of solar power was fed into the grid. First, the H_2O_2 concentration was kept constant at optimal conditions ($2,500 \text{ mgL}^{-1}$) and the ferrous concentration was changed. Four indicative alternative peroxide/ferrous ratios were examined, in addition to the initial scenario ($\text{H}_2\text{O}_2/\text{Fe}=125$). The examined ratios along with their treatment efficiencies are as follows: (i) $\text{H}_2\text{O}_2/\text{Fe}=150$, TOC removal 74%; (ii) $\text{H}_2\text{O}_2/\text{Fe}=90$, TOC removal 65%; (iii) $\text{H}_2\text{O}_2/\text{Fe}=60$, TOC removal 51%, and (iv) $\text{H}_2\text{O}_2/\text{Fe}=30$, TOC removal 42%. The 125 H_2O_2 to iron (mg/mg) ratio, which was the initial scenario that yielded a 79% TOC removal, was found to have the optimal treatment efficiency. When higher or lower $\text{H}_2\text{O}_2/\text{Fe}$ ratios are examined, then the total environmental footprint is not affected, compared to the treatment efficiency which suffers significant losses.

Another sensitivity analysis was carried out to examine how the total environmental footprint would be affected if the excess of solar power was fed back into the grid. In this case, where two 277 W PV modules are used, it is estimated that about 2.5 kWh/day could be fed back into the local grid while the battery bank will also not be required, thus bringing down the total

environmental footprint of the solar photo-Fenton process to 275.30 mPt, or reducing it by 3.93% reduction compared to the initial scenario, where the CPC plant operates in an autonomous mode. Nonetheless, it should be mentioned that in this case the CPC plant is not as versatile and adaptable and it would not be able to be installed in remote areas. Moreover, if additional PV modules were added in the system, as to solely produce and supply electricity to the grid, then depending on the amount of solar power fed back into the grid the process could have a near zero total environmental footprint. This would not mean that the system would not produce an impact to the environment, but rather that be a trade-off between wastewater treatment and renewable energy generation would be achieved. Therefore, incorporating renewable energy sources (RES), such as solar, in photo-Fenton and in wastewater treatment in general, is a strategy that can minimize environmental impacts and lead towards sustainable and low carbon wastewater treatment.

5. Conclusions

In this work the environmental sustainability of a semi-industrial autonomous solar compound parabolic collector (CPC) plant, based on solar photo-Fenton process assisted with ferrioxalate was assessed. The CPC plant treats effluents emanating from a pharmaceutical laboratory and it operates under Mediterranean climatic conditions, in Ciudad Real, Spain. The environmental sustainability was estimated by means of the life cycle assessment (LCA) methodology. It was found that the chemical reagents used (i.e. mainly hydrogen peroxide (H_2O_2) and to a lesser degree oxalic acid) were the main contributors to almost all impact categories, with marine and freshwater ecotoxicity categories being mostly affected. Therefore, future research should focus on investigating the effect of the effluent's initial organic loading on the environmental impacts of the process. To be more specific, the higher the initial organic content, the more the

499 amount of chemical reagents will be required to effectively treat the effluent. As a consequence,
500 the environmental sustainability of the process will be decreased. All in all, results of this work
501 may be a useful tool for researchers, the industry, decision and policy makers, since the
502 effective treatment of pharmaceuticals from real wastewater matrices is a major problem and
503 insight on the environmental sustainability of solar AOPs could help mitigate this problem.

504

505

506 **Acknowledgements**

507 Financial support from MINECO (CTM2013-44317-R) is gratefully acknowledged

508

509 **References**

510

511 AAB. 2002. Environmental Product Declaration For Electric Motor Type 90S 4 Pole
512 (3GAA092001-ASC). ABB Motors A/S.

513 Boustead, I., Fawer, M., 1996. Ecoprofile of hydrogen peroxide. A report for the Peroxygen
514 Sector Group of CEFIC

515 Chatzisyneon, E., Foteinis, S., Borthwick, A.G.L. 2016. Life cycle assessment of the
516 environmental performance of conventional and organic methods of open field pepper
517 cultivation system. *The International Journal of Life Cycle Assessment*, 1-13.

518 Chatzisyneon, E., Foteinis, S., Mantzavinos, D., Tsoutsos, T. 2013. Life cycle assessment of
519 advanced oxidation processes for olive mill wastewater treatment. *Journal of Cleaner
520 Production*, **54**, 229-234.

521 Davididou, K., Monteagudo, J.M., Chatzisyneon, E., Durán, A. & Expósito, A.J. 2017.
522 Degradation and mineralization of antipyrine by UV-A LED photo-Fenton reaction
523 intensified by ferrioxalate with addition of persulfate, *Separation and Purification
524 Technology*, 172, 227 – 235.

525 Expósito, A.J., Durán, A., Monteagudo, J.M., Acevedo, A. 2016. Solar photo-degradation of a
526 pharmaceutical wastewater effluent in a semi-industrial autonomous plant.
527 *Chemosphere*, **150**, 254-257.

528 Foteinis, S., Chatzisyneon, E. 2016. Life cycle assessment of organic versus conventional
529 agriculture. A case study of lettuce cultivation in Greece. *Journal of Cleaner
530 Production*, **112, Part 4**, 2462-2471.

531 Garcia-Segura, S., Brillas, E., 2016. Combustion of textile monoazo, diazo and triazo dyes by
 532 solar photoelectro-Fenton: Decolorization, kinetics and degradation routes. *Applied*
 533 *Catalysis B: Environmental*, **181**, 681–691.

534 Garcia-Segura, S., Brillas, E., 2014. Advances in solar photoelectro-Fenton: Decolorization
 535 and mineralization of the Direct Yellow 4 diazo dye using an autonomous solar pre-
 536 pilot plant. *Electrochimica Acta*, **140**, 384–395

537 Giménez, J., Bayarri, B., González, Ó., Malato, S., Peral, J., Esplugas, S. 2015. Advanced
 538 Oxidation Processes at Laboratory Scale: Environmental and Economic Impacts. *ACS*
 539 *Sustainable Chemistry & Engineering*, **3**(12), 3188-3196.

540 Goedkoop, M.J., R., H., M., H., A., D.S., J., S., R., V.Z. 2009. ReCiPe 2008, A life cycle
 541 impact assessment method which comprises harmonised category indicators at the
 542 midpoint and the endpoint level.

543 Grandclement ,C., Seyssiecq, I., Piram, A., Wong-Wah-Chung, P., Vanot, G., Tiliacos, N.,
 544 Roche, N., Doumenq P. 2017. From the conventional biological wastewater treatment
 545 to hybrid processes, the evaluation of organic micropollutant removal: A review. *Water*
 546 *Research*, **111**, 297-317.

547 Ioannou-Ttofa, L., Foteinis, S., Chatzisyneon, E., Michael-Kordatou, I., Fatta-Kassinos, D.
 548 2017. Life cycle assessment of solar-driven oxidation as a polishing step of secondary-
 549 treated urban effluents. *Journal of Chemical Technology & Biotechnology*, **92**(6), 1315-
 550 1327.

551 Ioannou-Ttofa, L., Foteinis, S., Chatzisyneon, E., Fatta-Kassinos, D. 2016. The environmental
 552 footprint of a membrane bioreactor treatment process through Life Cycle Analysis.
 553 *Science of the Total Environment*, **568**, 306-318.

554 ISO, -I.O.f.S. 2006a. ISO 14040:2006 - Environmental management -- Life cycle assessment
555 -- Principles and framework. International Organization for Standardization, Geneva,
556 Switzerland (2006).

557 ISO, I.O.f.S. 2006b. ISO 14044:2006 - Environmental management -- Life cycle assessment -
558 - Requirements and guidelines. International Organization for Standardization, Geneva,
559 Switzerland (2006).

560 Jülch, V., Telsnig, T., Schulz, M., Hartmann, N., Thomsen, J., Eltrop, L., Schlegl, T. 2015. A
561 Holistic Comparative Analysis of Different Storage Systems using Levelized Cost of
562 Storage and Life Cycle Indicators. *Energy Procedia*, **73**, 18-28.

563 Kidd, K.A., Blanchfield, P.J., Mills, K.H., Palace, V.P., Evans, R.E., Lazorchak, J.M., Flick,
564 R.W., 2007. Collapse of a fish population after exposure to a synthetic estrogen,
565 Proceedings of the National Academy of Sciences of the United States of America, **104**,
566 8897-8901.

567 Luo, Y., Guo, W., Ngo, H.H., Nghiem, L.D., Hai, F.I., Zhang, J., Liang, S., Wang, X.C. 2014.
568 A review on the occurrence of micropollutants in the aquatic environment and their fate
569 and removal during wastewater treatment. *Science of The Total Environment*, **473**, 619-
570 641.

571 Monteagudo, J.M., Duran, A., San Martín, I., Aguirre, M., 2009. Effect of continuous addition
572 of H₂O₂ and air injection on ferrioxalate-assisted solar photo-Fenton degradation of
573 Orange II. *Applied Catalysis B: Environmental*, **89**(3-4), 510-518.

574 Ono, T., Mulholland, E., Koffler, C., Murphy, S. 2015. Life Cycle Assessment of
575 Polypropylene Pressure Piping Systems. aquatherm GmbH.

576 Prieto-Rodriguez, L., Oller, I., Klammerth, N., Aguera, A., Rodriguez, E.M., Malato, S. 2013.
577 Application of solar AOPs and ozonation for elimination of micropollutants in
578 municipal wastewater treatment plant effluents. *Water Research*, **43**, 1521-1528.

579 PRé Consultants , B. 2017. ReCiPe, Vol. 2017. Stationsplein 121, 3818 LE Amersfoort, The
580 Netherlands.

581 Raibeck, L. 2008. Environmental analysis of biologically inspired self-cleaning surfaces. in:
582 *School of Mechanical Engineering*, Vol. Master of Science, Georgia Institute of
583 Technology. Atlanta, Georgia, pp. 1-237.

584 Rochester, J., 2013, Bisphenol A and human health: A review of the literature, *Reproductive*
585 *Toxicology*, **42**, 132-155.

586 Rodríguez, R., Espada, J.J., Pariente, M.I., Melero, J.A., Martínez, F., Molina, R. 2016.
587 Comparative life cycle assessment (LCA) study of heterogeneous and homogenous
588 Fenton processes for the treatment of pharmaceutical wastewater. *Journal of Cleaner*
589 *Production*, 124, 21-29

590 Virkutyte, J., Varma, R.S., Jegatheesan, V. 2010. *Treatment of Micropollutants in Water and*
591 *Wastewater*. IWA Publishing.

592 WHO, 2013, State of the Science of Endocrine Disrupting Chemicals-2012, World Health
593 Organization.

594

595

596

597 **List of Tables**

598 Table 1: The LCI of the solar driven, semi-industrial, autonomous CPC plant.

599

600

601 Table 1.

CPC WWTP configuration			Life span
Land use	Industrial area	40 m ²	20 years
Foundations	Concrete	2 m ³	20 years
	Reinforced steel	120 kg	
Frame	Aluminium	100 kg	20 years
Hourly energy needs	Electricity	0.277 Kwh	-
Photovoltaic panel	Atersa A-277P (277W)	2 units	20 years
Battery	Sonnenschein OPzV 960 Ah (1.92 kWh)	2 units	10-15 years
pump	Pan World NH-30PI-Z-D (50W)	1 unit	15 years
Flowmeter	Yokogawa ADMAG AXF0259	1 unit	20 years
PH-meter	CRISON Multimeter 44	1 unit	20 years
Storage tank	Polypropylene (PP)	48.13 kg	20 years
Pipping system	Polypropylene (PP)	55.52 kg	20 years
Compound	Borosilicate glass	189.16 kg	10 years
Parabolic Collectors (CPC)	tubes;		
	Aluminum reflector	50 kg	10 years
Reagent	Chemical nomenclature	Mass concentration (mg/L)	
Hydrogen peroxide	H ₂ O ₂	2,500	
Ferrous sulfate	FeSO ₄ ·7H ₂ O	20	
Oxalic acid	(COOH) ₂ ·2H ₂ O	120	
Sulfuric acid	H ₂ SO ₄	1,100	
Sodium hydroxide	NaOH	~10 ⁻³ (scarcely used, only if pH drops below 3)	
Waterborne emissions	Chemical nomenclature	Mass concentration (mg/L)	
Ferrous ion	Fe ²⁺	2	
Ferric ion	Fe ³⁺	18	

602

603

604

List of Figures

Figure 1: System boundaries of the CPC plant.

Figure 2: The main processes of the CPC WWTP and their contribution to the total GHG emissions ($\text{CO}_{2\text{eq}}$).

Figure 3: ReCiPe's midpoint impact categories for the treatment of 1m^3 of pharmaceutical industry wastewater by means of the ferrioxalate assisted homogeneous solar photo-Fenton process.

Figure 4: ReCiPe's normalized midpoint impact categories for the treatment of 1 m^3 of pharmaceutical industry wastewater.

Figure 5: ReCiPe's weighted endpoint damage categories per 1 m^3 of pharmaceutical effluent treated by the ferrioxalate assisted homogeneous solar photo-Fenton process.


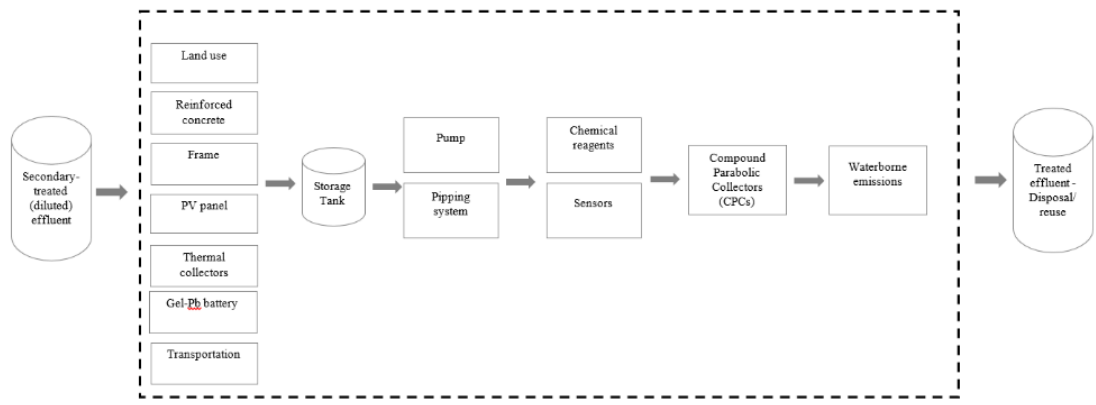


Figure 1.

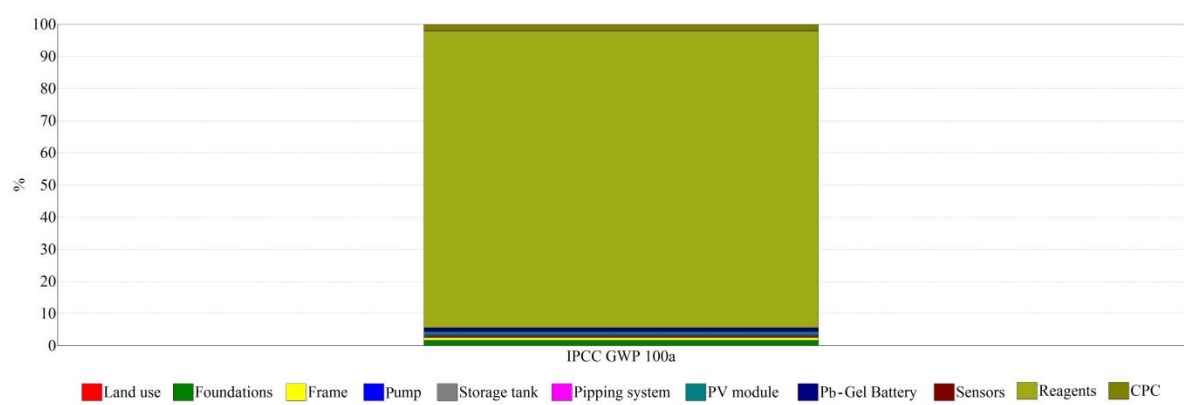

Method: IPCC 2013 GWP 100a V1.00 / Characterization

Figure 2.

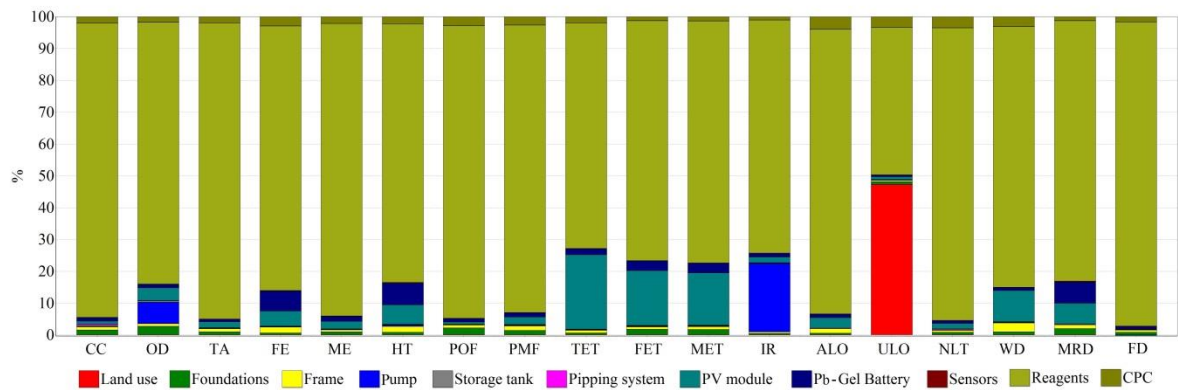


Figure 3.


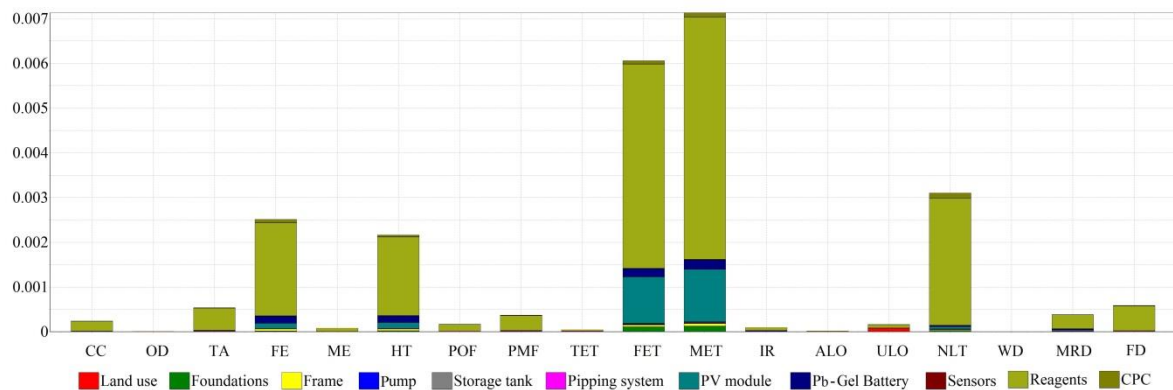


Figure 4.

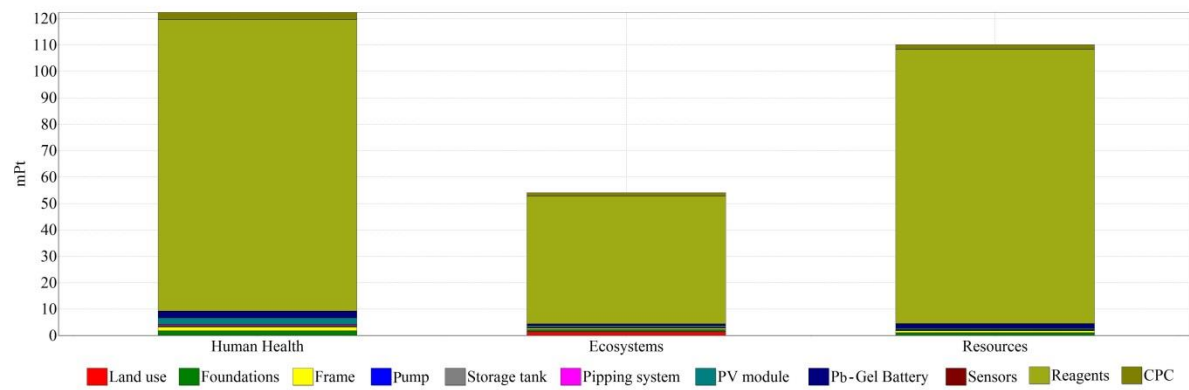

Method: ReCiPe Endpoint (H) V1.10 / Europe ReCiPe H/A / Weighting

Figure 5.